

BASALTINE



BASALTINE




colors

BASALTINE / WHITE




BASALTINE / SAND




BASALTINE / LIGHT GREY



BASALTINE / DARK GREY



BASALTINE / NUT



With the option of using either a natural or grip finish, Basaltine is ideal for both walls and floors. The six sizes, available in rectified format, also help to create clean and modern atmospheres.






Basaltine is a color body porcelain tile inspired by the **natural elegance** of volcanic stone, a contemporary look designed to satisfy the most sophisticated aesthetic and architectonic tastes and requirements.



BASALTINE / WHITE

BASALTINE

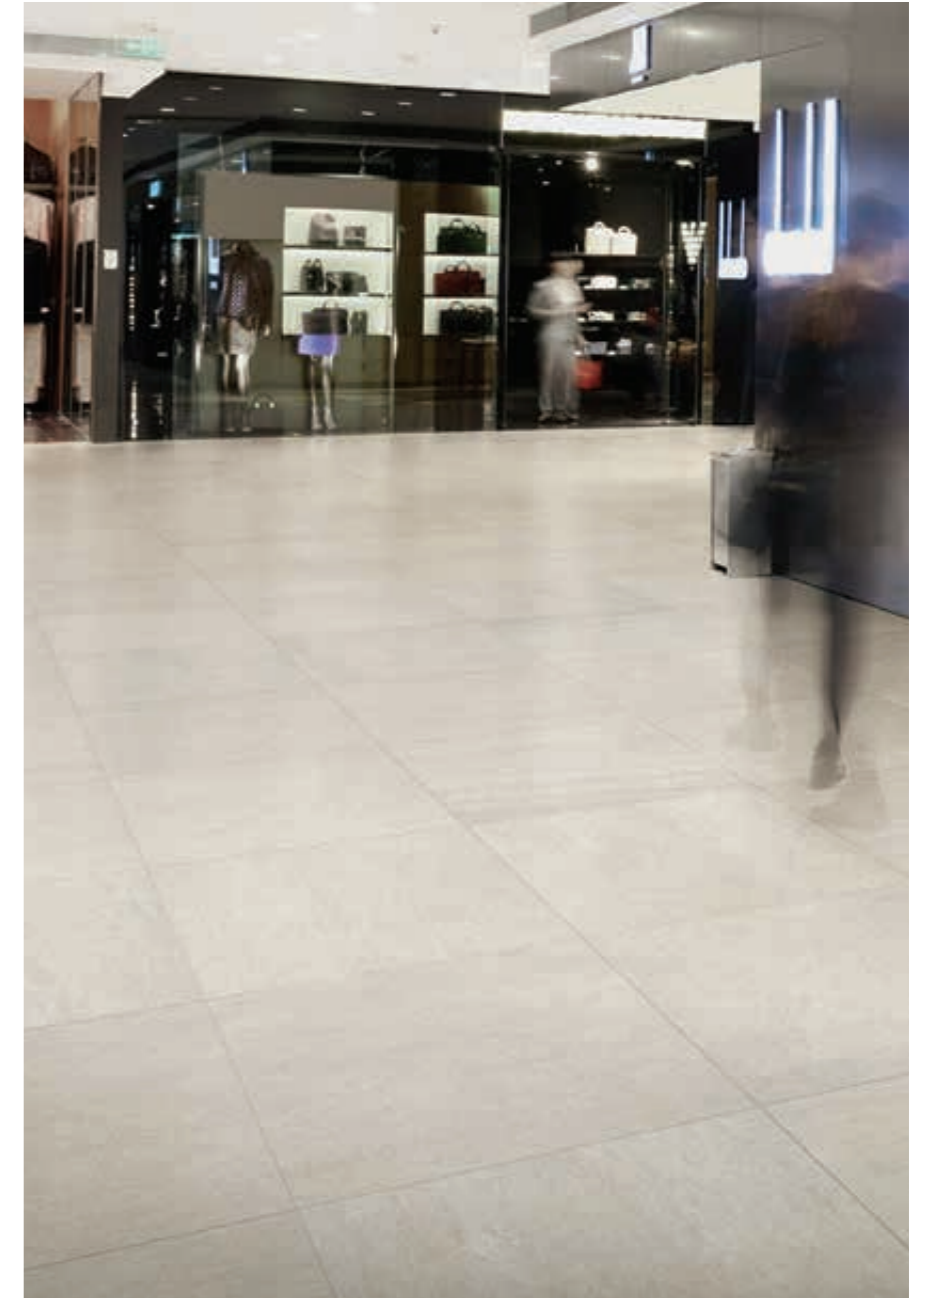



12"x12" / **WHITE** . fireplace: 12"x24" / **NUT**



BASALTINE / SAND

BASALTINE





24"x24" / SAND



12"x24". 24"x24" / SAND



BASALTINE / LIGHT GREY

20 | **BASALTINE**



24"x24" / LIGHT GREY



12"x24" / LIGHT GREY





BASALTINE / DARK GREY

BASALTINE





12"x12".12"x24" / DARK GREY





BASALTINE / **NUT**

BASALTINE





12"x12". 12"x24" / NUT



12"x24" / NUT

SIZES & SHADE VARIATION

sizes:

24"x48"
Rectified



1096320 White
1096321 Sand
1096322 Nut
1096323 Light Grey
1096324 Dark Grey

24"x24"
Rectified



1096219 White
1096220 Sand
1096221 Nut
1096222 Light Grey
1096223 Dark Grey

18"x36"
Rectified



1096273 White
1096274 Sand
1096275 Nut
1096276 Light Grey
1096277 Dark Grey

12"x24"
Rectified



1096209 White
1096210 Sand
1096211 Nut
1096212 Light Grey
1096213 Dark Grey

6"x24"
Rectified



1096214 White
1096215 Sand
1096216 Nut
1096217 Light Grey
1096218 Dark Grey

12"x12"
Rectified



1096199 White
1096200 Sand
1096201 Nut
1096202 Light Grey
1096203 Dark Grey


12"x12"
Rectified Grip finish



1096204 White
1096205 Sand
1096206 Nut
1096207 Light Grey
1096208 Dark Grey

mosaics & trim pieces:

12"x12"
mosaic 2"x2"



1096164 White
1096165 Sand
1096166 Nut
1096167 Light Grey
1096168 Dark Grey

3"x12" Bullnose




1096225 White
1096226 Sand
1096227 Nut
1096228 Light Grey
1096229 Dark Grey

6"x12" Cove Base *special order only



1096230 White
1096231 Sand
1096232 Nut
1096233 Light Grey
1096234 Dark Grey

Colors shown may vary from actual product.
Final selection should be made from actual product samples.



V1

UNIFORM APPEARANCE
Differences among pieces from the same production run are minimal.



V2

SLIGHT VARIATION
Clearly distinguishable differences in texture and/or pattern with similar colors.



V3








MODERATE VARIATION
While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece will vary significantly.



V4

SUBSTANTIAL VARIATION
Random color differences from tile to tile, so that one tile may have totally different colors from that on other tiles. Thus, the final installation will be unique.

technical specifications

		REFERENCE VALUE	DECLARED VALUE	TEST METHOD
	SURFACE ABRASION		IV	ASTM C1027
	WATER ABSORPTION	≤0.5%	MEETS REQUIREMENT	ASTM C373
	CHEMICAL RESISTANCE	AS REPORTED	NOT AFFECTED	ASTM 650
	DYNAMIC COEFFICIENT OF FRICTION	≥0.42 WET	MEETS REQUIREMENT	ANSI A137.1
	STAIN RESISTANCE	AS REPORTED	NOT AFFECTED	ASTM C1378
	BREAKING STRENGTH		≥400	ASTM C648
	RESISTANCE TO FREEZE		RESISTANT	ASTM C1026



RESISTANT FOR THE HOUSE The product is water-resistant: it stops liquids, body oils, acidic and staining substances from penetrating the tiles. It resists scratches, scuffs and gauges better than any other floor covering. It does not absorb fumes, odors or smoke. It doesn't discolor or fade when exposed to sunlight, or other natural elements. It is completely fire proof. It resists burns and doesn't feed a fire. Its high resistance to abrasive dirt and grime makes it suitable even for heavy-traffic areas of the house such as hallways, entrances, foyers and walkways.

FROST RESISTANT Exceeding the ADA standard requirements, the Milestone product can also be used for outside applications. It stands up to abrupt temperature changes and freezing-thaw cycles. When properly installed according to ANSI A137.1. It's strong enough to be used in exterior applications even in frigid climates. Proper consideration must be given to the anti-slip requirements of the area to be tiled.

ANTI-SLIP The testing conducted on our finished product will guarantee that all of our tiles will have an anti-slip surface so they may be used with total confidence in kitchen and bath applications. The Milestone product is perfect for both home and commercial interiors, such as restaurants, offices, retail stores, etc. Its anti-slip properties provide a safe walking surface in both wet and dry conditions, according to the Americans with Disabilities Act.

HYGIENE/SANITATION & EASY CLEANING The Milestone product doesn't absorb odors or bacteria of any kind. It's easy to clean with a damp sponge, mop, or cloth. For a more intense cleaning, simply use a mild solution of water and a common household detergent. Regular cleaning will stop the growth of germs and bacteria in damp areas such as the bathroom.

• DUE TO THE INHERENT NATURE OF FIRED PORCELAIN TILE, IT IS IMPORTANT TO NOTE THAT THE COEFFICIENT OF FRICTION MAY VARY WITHIN AND BETWEEN PRODUCT RUNS.

packaging

SIZES	METRIC (CM)	THICKNESS (MM)	PIECES PER BOX	SQ. FT PER BOX	WEIGHT PER BOX	BOXES PER PALLET	UOM PER PALLET	WEIGHT PER PALLET*
FIELD TILES								
12"x12" RECTIFIED	30x30	10 mm	13	13	53.3	48	624	2,558
12"x24" RECTIFIED	30x60	10 mm	6	12	49.2	48	576	2,362
6"x24" RECTIFIED	15x60	10 mm	12	12	49.2	48	576	2,362
24"x24" RECTIFIED	60x60	10 mm	3	12	49.2	36	432	1,771
24"x48" RECTIFIED	60x120	10 mm	3	24	115.2	21	504	2,419
18"x36" RECTIFIED	45x90	10 mm	3	13.5	62.1	27	365	1,677
MOSAICS AND COORDINATING TRIMS								
3"x12" BULLNOSE	7.5x30	10 mm	12	3	12.3	168	2,016 pcs	2,066
6"x12" COVEBASE	15x30	7 mm	10	5	17.5	64	640 pcs	1,120
2"x2" MOSAIC 12"x12"	30x30	10 mm	10	10	41	45	450 pcs	1,845

* WEIGHT PER PALLET DOES NOT INCLUDE PALLET WEIGHT ITSELF.

ALL OTHER SIZES WILL BE PACKAGED AS ORDERED.

PLEASE CONTACT MILESTONE CUSTOMER SERVICE AT 1-877-356-7461 FOR PACKAGING INFORMATION.

MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16") IF STAGGERED TILE PLACEMENT, WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").

- Routine care instructions:
1. Wash with water to remove superficial dirt.
 2. Application of Fila Cleaner® Fila (commercial product) diluted to an average of 1:200 to the surface.
 3. Let the solution sit 5-7 minutes.
 4. Remove the cleaner with a vigorous mechanical cleaning action using common hand cleaning equipment, or a suitable floor-cleaning appliance.
 5. Dry the floor completely.

Note: For desired results, it is particularly important to combine the effect of the detergent with a vigorous mechanical cleaning action.

The products mentioned in these instructions do not officiate any official agreements with any floor cleaning product producers.

CLEANING & MAINTENANCE



CERTIFICATIONS & ACCREDITATIONS

PROGRESS THAT TOUCHES AND INVESTS IN THE ENTIRE SOCIETY

As a active member of the U.S Green Building Council, Milestone spreads awareness to the entire American communities and encourages towards the use of building solutions inspired by environmentally friendly practices. Using Milestone products for project implementation, will positively contribute in obtaining scores and points required for earning the LEED certification (Leadership in Energy and Environmental Design).

A COMMITMENT TO THE DEVELOPMENT OF PRODUCTS FOR A CONSCIOUS BUILDING TRADE

Milestone offers products containing recycled material. The adoption of eco-compatible production systems is merit of Italian designs produced in the U.S.

TECHNICAL DEVELOPMENT THAT CONSIDERS THE NATURAL ENVIRONMENT

Milestone commits to the eco-compatible project and translates the same into an avant-guard production process, minimizing the negative impact on the environment.

WHY PORCELAIN?

There are many reasons to choose impervious porcelain tile over other floor coverings. It offers the largest array of design options and holds its value the longest. In a comparison between the many different flooring options, porcelain tile offers one of the most durable and least expensive options over the lifespan of the building.

Benefits of Porcelain Tile

- Impervious to water
- Easy to maintain
- Variety of design options
- Environmentally friendly
- Resistant to germs and bacteria
- Fade resistant
- Fire resistant
- Durable - best long-term value vs. other floor coverings

SUGGESTED INSTALLATIONS

PEI Class IV
Moderate to heavy foot traffic
 Recommended for all residential applications as well as medium commercial and light institutional applications.



300 International Blvd. Clarksville, TN 37040 | www.milestonetiles.com | 1-877-356-7461

