



(knoxwood™)

glazed porcelain stoneware | 3D printing technique



spice

6"x24"



Classic hardwood graining and colorations in Knoxwood glazed porcelain by Marazzi USA make it a go-to alternative for natural wood. Authentic knots and grainline variations from plank to plank exemplify a realistic hardwood visual while the porcelain body contributes strength and durability.



Knoxwood exudes the warmth and richness of natural wood in 6"x24" size. Plank-to-plank graining variation contributes realistic hardwood feel to floors, walls, backsplashes, and exteriors. Easy-to-handle 6"x24" modules are well-suited for both wet and dry areas, permitting installation in shower, backsplash, and patio spaces not typically conducive to wood.



caraway

6"x24"



Four realistic mid-range colorways – Caraway (gray), Ginger (light brown), Nutmeg (dark brown), Spice (medium brown) – feature a smooth surface with 20+ different faces, the result of fine-tuned 3d digital imagery. This extensive pattern variation only heightens the similarity to real wood and assures visual movement throughout the installation. Straight edges punctuate the clean, modern feel.

nutmeg

6"x24"




Ginger



Spice



KW01 Ginger
6"x24"

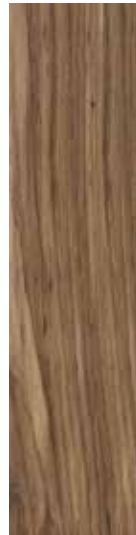

KW03 Spice
6"x24"

technical

ASTM Test Results

Technical Characteristics	ASTM Standards	ASTM Test Results	ASTM Test Methods
Water Absorption	≤ 0.50%	≤ 0.50%	C373
Frost Resistance	As Reported	Resistant	C1026
Scratch Resistance	MOHS 1-10	8	MOHS Scale
Breaking Strength	> 250 lbf.	> 275 lbs.	C648
Facial Dimension	+/- 3.0% From Nominal	Within Standard	C499
Thickness	≤ 0.04 in (1.02 mm max)	Within Standard	C499
Wedging (squareness)	+/- 0.50% or +/- 2.0 mm**	Within Standard	C502
Warpage (flatness)	+/- 0.75% or +/- 2.3 mm**	Within Standard	C485
Abrasion Resistance	Class 0 - Class V	Class III	C1027
DCOF-Dynamic Coefficient of Friction (Wet Areas Only) [†]	As Reported	Minimum 0.42	DCOF AcuTest SM **
Chemical Resistance	Class A - Class E	Class A	C650
Stain Resistance	Class A - Class E	Class A	C1378

[†]Dynamic Coefficient of Friction (DCOF) - Water, oil, grease or other fluids create slippery conditions. When installing floors in areas with exposure to these conditions, a minimum D.C.O.F. value of 0.42 is required. Additionally, extra caution is required with regards to product selection and proper maintenance. Visit www.tcnatile.com for complete information regarding the DCOF AcuTest test method and values.

^{**}DCOF AcuTest is the industry designation for the test procedure contained in ANSI A137.1 Section 9.6, which has been extensively researched, allows for in-situ field measurements, and is in use at tile manufacturing facilities. It was so named to distinguish it from other DCOF measurements using different instruments and/or protocols.

** Whichever is less

- Floor Tile
- Wall Tile
- 3d Printing Technique
- Slight Variation
- Frost Resistant

- Abrasion Resistance
- D.C.O.F. (Wet Areas)
(Minimum 0.42)
- 21% Minimum Pre-Consumer Recycled Content
- No VOC

made in the
USA



Contributes to
LEED Credits



Nutmeg



Caraway





KW04 Nutmeg
 6"x24"



KW02 Caraway
 6"x24"

packaging

	Sizes	Pcs	Sq. Ft.	Weight (lbs.)	Thickness
Floor Tile	6"x24"	15	14.53	57.97	5/16" (8 mm)

	Sizes	Ctn	Sq. Ft.	Weight (lbs.)
Floor Tile	6"x24"	32	464.96	1855.19



American Marazzi Tile, Inc.
Headquarters & Manufacturing Plant

359 Clay Road East
Sunnyvale, Texas 75182

www.marazzitile.com
contact@marazzitile.com



Color and other aesthetic features shown are as close as the limitation of the printing process will allow. We have tried to make this brochure as comprehensive and factual as possible. We reserve the right, however, to make changes at any time, without notice, in colors, materials, packaging, specifications and availability. Since some information may have been updated since time of printing, please check with American Marazzi Tile Customer Service for details.